



Noesberger Maschinen AG
 Noesberger machines SA
 Postfach/CP 27, Tasberg 37
 CH-1717 St. Ursen (St-Ours)


+41 26 322 22 77
 pompes@noesberger.swiss
 www.noesberger.swiss



Tauchpumpe für sauberes Wasser

Serie 2"-UG

Pompe submersible pour eau claire

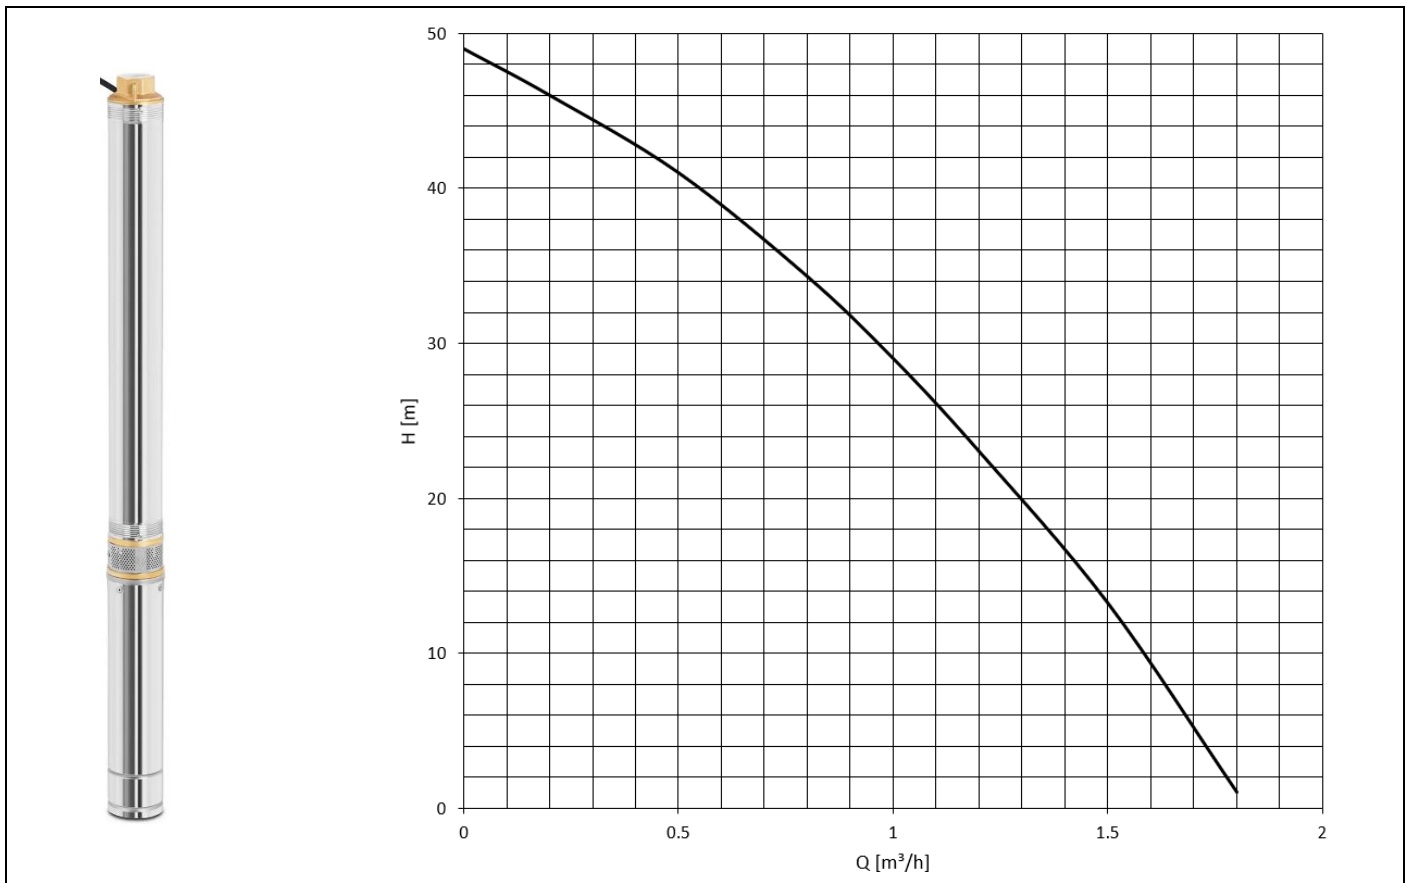

Typ Type	Motordaten Données moteur		Masse Dimensions			Q m³/h l/min	Fördermenge / Débit						
	U [V]	P [kW]	∅ [mm]	L [mm]	DN [-]		0	0.5	0.8	1	1.2	1.5	1.8
UG 140	230	0.67	53	1687	½"	H (m)	49	40	33	29	25	12	1

Anwendungsbereich

Tauchpumpe zur Förderung von sauberem Wasser, ohne Festkörper, bis zu einer Temperatur von 35° C.

Application

Pompes submersibles, destinées au transfert d'eau propre sans particules en suspension jusqu'à une température de 35°C.

Konstruktion:		Construction :	
Gehäuse	: Rostfreier Stahl	Carcasse	: Acier inox
Isolationsklasse	: "B", IP 68	Classe d'isolation	: "B", IP 68
Einschaltungen	: Max. 40 pro Stunde	Enclenchements	: Max. 40 par heure